



TOPCon

DHN-54X16/DG(BB)

0~+5W

420~430W



Higher Power Generation Efficiency

N-type TOPCon module could increase power generation by 3%+ per watt compared with PERC module



Higher Power Output

Bifacial module back-side power increases 5-25%



Lower Degradation Rate

First-year $\leq 1\%$, 2-30 year $\leq 0.4\%$



Lower Temp. Coefficient

More power generation under high-temperature



Better Dim Light Performance

Excellent performance under dim light

Comprehensive Products & System Certificates

IEC 61215 / IEC 61730 / CE / INMETRO

ISO 45001: 2018/International standards for occupational health & safety

ISO 14001: 2015/Standards for environmental management system


ISO 9001: 2015/Quality management system



Quality Guarantee

15-Year Material & Technology Warranty


30-Year Linear Power Output Warranty

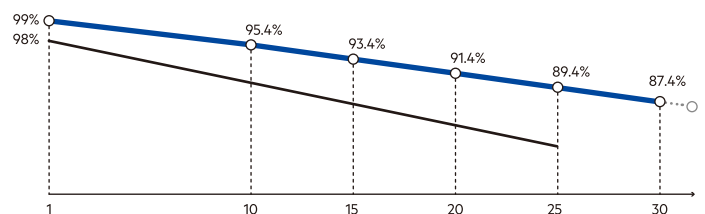

▲ DAH Solar Linear power output guarantee ▲ Standard Linear power output guarantee

Mechanical Specification

Cable	4.0mm ² , 350/250mm in length, (Including Connector) length can be customized
No.of Cells	108 (6×18)
Glass	2.0mm High Transmission, Antireflection Coating
Junction Box	IP68, 3 Bypass Diodes
Connector	MC4 Compatible
Weight	24kg
Cells Type	N-type 182×91mm
Dimension (L×W×T)	1722×1134×30mm
Packing	36pcs/Pallet, 936pcs/40HQ

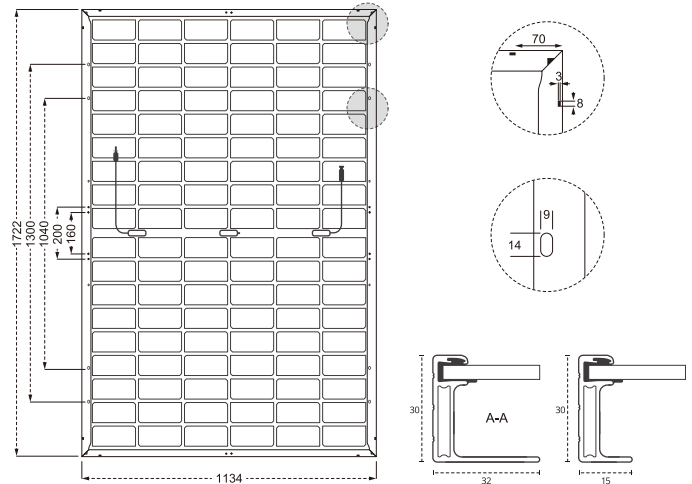

Electrical Characteristics

Module Type	DHN-54X16/DG(BB)							
	STC		NOCT		STC		NOCT	
Maximum Power (Pmax)	420	316	425	320	430	323		
Open-circuit Voltage (Voc)	37.6	35.72	37.8	35.91	38.0	36.10		
Maximum Power Voltage (Vmp)	32.1	30.50	32.3	30.69	32.5	30.88		
Short-Circuit Current (Isc)	13.72	11.08	13.78	11.13	13.84	11.17		
Maximum Power Current (Imp)	13.08	10.36	13.16	10.42	13.23	10.47		
Module Efficiency (STC)	21.51		21.76		22.02			
Refer Bifacial Factor			80±5%					

STC: Standard Test Environment : Irradiance 1000W/m², Cell temperature 25°C, Spectrum AM1.5

NOCT: Standard Test Environment : Irradiance 800W/m², Ambient temperature 20°C, Spectrum AM1.5, Wind speed 1m/s

Double-Sided Power Generation Parameters (Rear gain)

%	Parameter	441		446		452	
		22.58	22.85	23.12	24.73	25.03	25.32
5%	Maximum Power (Pmax)	441	446	452			
	Module Efficiency (%)	22.58	22.85	23.12			
15%	Maximum Power (Pmax)	483	489	495			
	Module Efficiency (%)	24.73	25.03	25.32			
25%	Maximum Power (Pmax)	525	531	538			
	Module Efficiency (%)	26.89	27.21	27.53			

Operating Parameters

Maximum System Voltage	1500V DC
Power Tolerance	0~+5W
Operating Temperature	-40 ~ +85°C
Maximum Series Fuse Rating	30A
Nominal Operating Cell Temperature	45°C±2°C
Application Level	Class A

Temperature Coefficient

Temperature Coefficient of Isc (α Isc)	0.046%/°C
Temperature Coefficient of Voc (β Voc)	-0.25%/°C
Temperature Coefficient of Pmax (γ Pmp)	-0.30%/°C

Mechanical Loads

Snow load, frontside / Wind load, backside	5400Pa/2400Pa
--	---------------

I-V Curve

