ZERTIFIKAT ◆ CERTIFICATE ◆ 認證證書 ◆ СЕРТИФИКАТ ◆ CERTIFICADO ◆ CERTIFICAT

Product Service

C E R T I F I C A T E

No. Z2 099333 0069 Rev. 04

Holder of Certificate: **LONGi Green Energy Technology Co., Ltd.**
No. 388, Middle Hangtian Road
Chang'an District
710100 Xi'an City, Shaanxi
PEOPLE'S REPUBLIC OF CHINA

Certification Mark:

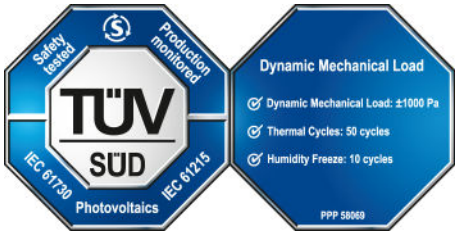

Product: **Crystalline Silicon Terrestrial Photovoltaic (PV) Modules**

Mono-Crystalline Silicon Photovoltaic Module

The product was tested on a voluntary basis and complies with the essential requirements. The certification mark shown above can be affixed on the product. It is not permitted to alter the certification mark in any way. In addition, the certification holder must not transfer the certificate to third parties. This certificate is valid until the listed date, unless it is cancelled earlier. All applicable requirements of the testing and certification regulations of TÜV SÜD Group have to be complied. For details see: www.tuvsud.com/ps-cert

Test report no.: 704061802069-04

Valid until: 2027-07-25

Date, 2022-07-26

(Zhulin Zhang)

TÜV SÜD Product Service GmbH • Certification Body • Ridlerstraße 65 • 80339 Munich • Germany

TÜV®

ZERTIFIKAT ◆ CERTIFICATE ◆ 認證證書 ◆ СЕРТИФИКАТ ◆ CERTIFICADO ◆ CERTIFICAT

Product Service

C E R T I F I C A T E

No. Z2 099333 0069 Rev. 04

Model(s):

LR6-72PH-xxxM, (xxx=340 to 380 in step of 5)
LR6-60PH-xxxM, (xxx=285 to 315 in step of 5)
LR6-72HPH-xxxM, (xxx=365 to 395 in step of 5)
LR6-60HPH-xxxM, (xxx=300 to 325 in step of 5)
LR4-72HPH-xxxM, (xxx=420-455, in step of 5)
LR4-60HPH-xxxM, (xxx=350-375, in step of 5)
LR4-72ZPH-xxxM, (xxx=420-435, in step of 5)
LR4-60ZPH-xxxM, (xxx=350-365, in step of 5)
LR4-78ZPH-xxxM, (xxx=455-485 in step of 5)
LR5-72HPH-xxxM, (xxx=525-555 in step of 5)
LR5-66HPH-xxxM, (xxx=480-505 in step of 5)
LR5-72HTH-xxxM, (xxx=555-600 in step of 5)
LR5-54HTH-xxxM, (xxx=420-450 in step of 5)
LR5-54HTB-xxxM, (xxx=410-440 in step of 5)
xxx stands for the rated power at STC.

Parameters:

Fire Safety Class:	Class C according to UL790.
Safety Class:	Class II
Max. System Voltage:	1500V DC
Construction:	Framed, with Junction box, cable and connector.

Remark: The test method is referred to IEC TS 62782:2016.

Tested according to:

PPP 58069A:2013
IEC 61215-1:2016
IEC 61215-1-1:2016
IEC 61215-2:2016
IEC 61730-1:2016
IEC 61730-2:2016

TÜV SÜD Product Service GmbH • Certification Body • Ridlerstraße 65 • 80339 Munich • Germany

TÜV®